

## Five Key Features

- 1 Guaranteed quality: 12 year product warranty, 25 year performance warranty \*
- 2 Predictable output: Positive power sorting of 0 to + 5 W
- 3 Innovative solutions: Anti-reflecting coating for high sunlight absorption
- 4 Robust design: Module certified to withstand high snow loads, up to 5.4 kN/m<sup>2</sup> \*\*
- 5 Long term responsibility: Free module recycling in PV Cycle member countries

\* Please refer to Hanwha SolarOne Co., Ltd. Product Warranty for details.

\*\* Please refer to Hanwha SolarOne Co., Ltd. module Installation Guide.

## Quality and Environmental Certificates

- ISO 9001 quality standards and ISO 14001 environmental standards
- OHSAS 18001 occupational health and safety standards
- IEC 61215 and IEC 61730 Class A certifications
- Conformity to CE



## About Hanwha SolarOne Co., Ltd.

Hanwha SolarOne Co., Ltd. is a vertically integrated manufacturer of photovoltaic modules designed to meet the needs of the global energy consumer.

- High reliability, guaranteed quality, and excellent cost-efficiency due to vertically integrated production and control of the supply chain;
- Optimization of product performance and manufacturing processes through a strong commitment to research and development;
- Global presence throughout Europe, North America, and Asia, offering regional technical and sales support.

# SF260 | Poly

## Electrical Characteristics

### Electrical Characteristics at Standard Test Conditions (STC)

Power Class	270 W	275 W	280 W	285 W	290 W	295 W
Maximum Power (P <sub>max</sub> )	270 W	275 W	280 W	285 W	290 W	295 W
Open Circuit Voltage (V <sub>oc</sub> )	44.0 V	44.1 V	44.3 V	44.5 V	44.7 V	44.9 V
Short Circuit Current (I <sub>sc</sub> )	8.20 A	8.35 A	8.40 A	8.45 A	8.50 A	8.55 A
Voltage at Maximum Power (V <sub>mpp</sub> )	36.0 V	36.1 V	36.1 V	36.2 V	36.3 V	36.4 V
Current at Maximum Power (I <sub>mpp</sub> )	7.50 A	7.62 A	7.76 A	7.87 A	7.99 A	8.11 A
Module Efficiency (%)	13.7 %	14.0 %	14.3 %	14.5 %	14.7 %	15.0 %
Cell Efficiency (%)	15.5 %	15.8 %	16.0 %	16.2 %	16.5 %	16.8 %

P<sub>max</sub>, V<sub>oc</sub>, I<sub>sc</sub>, V<sub>mpp</sub>, and I<sub>mpp</sub> tested at STC defined as irradiance of 1000 W/m<sup>2</sup> at AM 1.5 solar spectrum and temperature 25 ± 2 °C. Electrical Characteristics: measurement tolerance of ± 3 %.

### Electrical Characteristics at Normal Operating Cell Temperature (NOCT)

Power Class	270 W	275 W	280 W	285 W	290 W	295 W
Maximum Power (P <sub>max</sub> )	197 W	200 W	204 W	208 W	211 W	215 W
Open Circuit Voltage (V <sub>oc</sub> )	40.5 V	40.6 V	40.8 V	40.9 V	41.1 V	41.3 V
Short Circuit Current (I <sub>sc</sub> )	6.63 A	6.76 A	6.80 A	6.84 A	6.88 A	6.92 A
Voltage at Maximum Power (V <sub>mpp</sub> )	32.7 V	32.8 V	32.9 V	33.0 V	33.1 V	33.2 V
Current at Maximum Power (I <sub>mpp</sub> )	6.00 A	6.10 A	6.21 A	6.30 A	6.39 A	6.49 A
Module Efficiency (%)	12.5 %	12.7 %	13.0 %	13.2 %	13.4 %	13.7 %
Cell Efficiency (%)	15.5 %	15.8 %	16.0 %	16.2 %	16.5 %	16.8 %

P<sub>max</sub>, V<sub>oc</sub>, I<sub>sc</sub>, V<sub>mpp</sub>, and I<sub>mpp</sub> tested at NOCT defined as irradiance of 800 W/m<sup>2</sup>; wind speed 1 m/s. Electrical Characteristics: measurement tolerance of ± 3 %.

### Temperature Characteristics

Normal Operating Cell Temperature (NOCT)	45 °C ± 3 °C
Temperature Coefficients of P	-0.45 % / °C
Temperature Coefficients of V	-0.32 % / °C
Temperature Coefficients of I	+0.04 % / °C

### Maximum Ratings

Maximum System Voltage	1000 V (IEC)
Series Fuse Rating	15 A
Maximum Reverse Current	Series fuse rating multiplied by 1.35

## Mechanical Characteristics

Dimensions	1966 mm × 1000 mm × 50 mm
Weight	26 kg
Frame	Aluminum alloy
Front	Tempered glass
Encapsulant	EVA
Back Cover	Composite sheet
Cell Technology	Polycrystalline
Cell Size	156 mm × 156 mm
Number of Cells (Pieces)	72 (6 × 12)
Junction Box	Protection class IP65 with bypass-diode
Output Cables	Solar cable: 4 mm <sup>2</sup> ; length 1200 mm
Connector	Linyang LY0706-2

## System Design

Operating Temperature	-40 °C to 85 °C
Hail Safety Impact Velocity	25 mm at 23 m/s
Fire Safety Classification (IEC 61730)	Class C
Static Load Wind/Snow	2400 Pa/5400 Pa

## Packaging and Storage

Storage Temperature	-40 °C to 85 °C
Packaging Configuration	20 pieces per pallet
Loading Capacity (40 ft. HQ Container)	440 pieces


### Nomenclature

Full product name:  
SF260-36-1Pxxx  
xxx represents the power class


### Performance at Low Irradiance:

The typical relative change in module efficiency at an irradiance of 200 W/m<sup>2</sup> in relation to 1000 W/m<sup>2</sup> (both at 25 °C and AM 1.5 spectrum) is less than 5 %.

Various Irradiance Levels

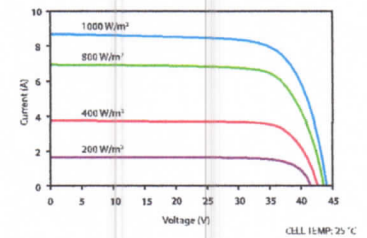

Basic Design

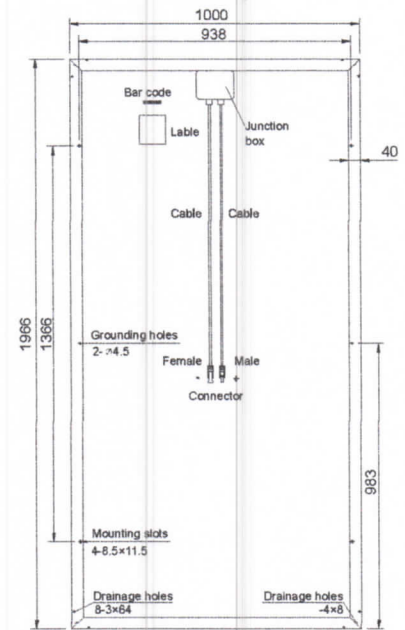

BACK VIEW

